

Modelo: NL621E Camera IP 2.4 Mega-Pixel 15 Mts Externa/Interna PoE




- Compressão de vídeo H.264, JPEG
-
- 2.4 Mega – Pixel
-
- Grava direto no seu Micro ou em outro fora da rede através da internet
-
- Acesso de qualquer PC através da internet
-
- Filtro de infravermelho automático
-
- Alta performance com baixa luminosidade, chaveamento automático para o modo “Dia/Noite”
-
- Sincronização de áudio e vídeo
-
- LEDs infravermelhos com cobertura de até 15 m
-
- Detecção de movimento: envia fotos para seu Email
-
- Senhas com diferentes níveis para restrição de acesso
-
- Suporte a DDNS
-
- PTZ
-
- PoE: Alimentação de energia através do cabo de rede
-
- Senhas com diferentes níveis para restrição de acesso

*subject to change without notice.

Specifications		
Video Compression	H.264/Motion JPEG	
Video Resolution	2 MEGA: 1600 x 1200 HD720: 1280 x 720 SVGA: 800 x 600 VGA: 640 x 480 QVGA: 320 x 240	
Bit Rate	64K ~ 6M bits/sec (CBR/VBR configurable)	
Frame Rate	30 FPS @ HD720/VGA/QVGA/CIF 15 FPS @ 2 Megapixel (1600 x 1200)	
Image Device	CMOS(HD) 2M	
Lens Type	Fixed lens, CS mount, IR correction, Focal length 6.0mm, F1.8	
Radiant Distance	15M	
IR LED	12 units IR 8 ψ LED, 850nm	
Day/Night Function	Mechanical IR cut filter	
Minimum Illumination	IR OFF:1.5 lux @ F1.8; IR ON: 0 lux (15M)	
Video Control	Digital PTZ, controllable frame/bitrate(bandwidth), VBR/CBR control, RTSP path	
Image Adjustment	Brightness, Saturation, Sharpness, Exposure control, White balance, Backlight compensation, Rotation	
Event System	Trigger	GPIN, Motion detection, Manual trigger
	Action	File upload via email Alarm notification via email External output activation
Network Interface	10 BASE-T/100 BASE-TX	
Protocols	HTTP, HTTPS, TCP/IP, IPv4, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, Bonjour, DNS, ARP, ICMP, RTSP, RTP	
Audio Capability	1 x Audio line input, 1 x Audio line output	
Audio Compression	G.711 PCM 8Khz	
Power Supply	AC/DC switching power adapter, input: AC100~240V, output: DC 12V/2A Built-in PoE IEEE 802.3af Class 3 (PoE model)	
Security	Password protection, Hhttps encryption, User access log	
Power Consumption	8W	
Water Proof Standard	IP66	
Operation Temperature	-10°C ~ 50°C	
Operation Humidity	20% ~ 80% RHG	
Dimension (L x W x H)	77mm(W) x 160mm(L) x 80mm(H)	
Net Weight	820g	
I/O Connectors	1 x RJ45 10 BASE-T/100 BASE-TX(LED x 2) 1 x BNC composite video output 1 x DC jack 1 x Terminal block 1 x Audio line out jack 1 x Audio line in jack	
Package Contents	1 x CD (manual and software) 1 x Quick Installation Guide 1 x Stand for mount 1 x AC/DC Power adapter (Not included for PoE model) 1 x Tool package	

Dimension Diagram Unit:mm

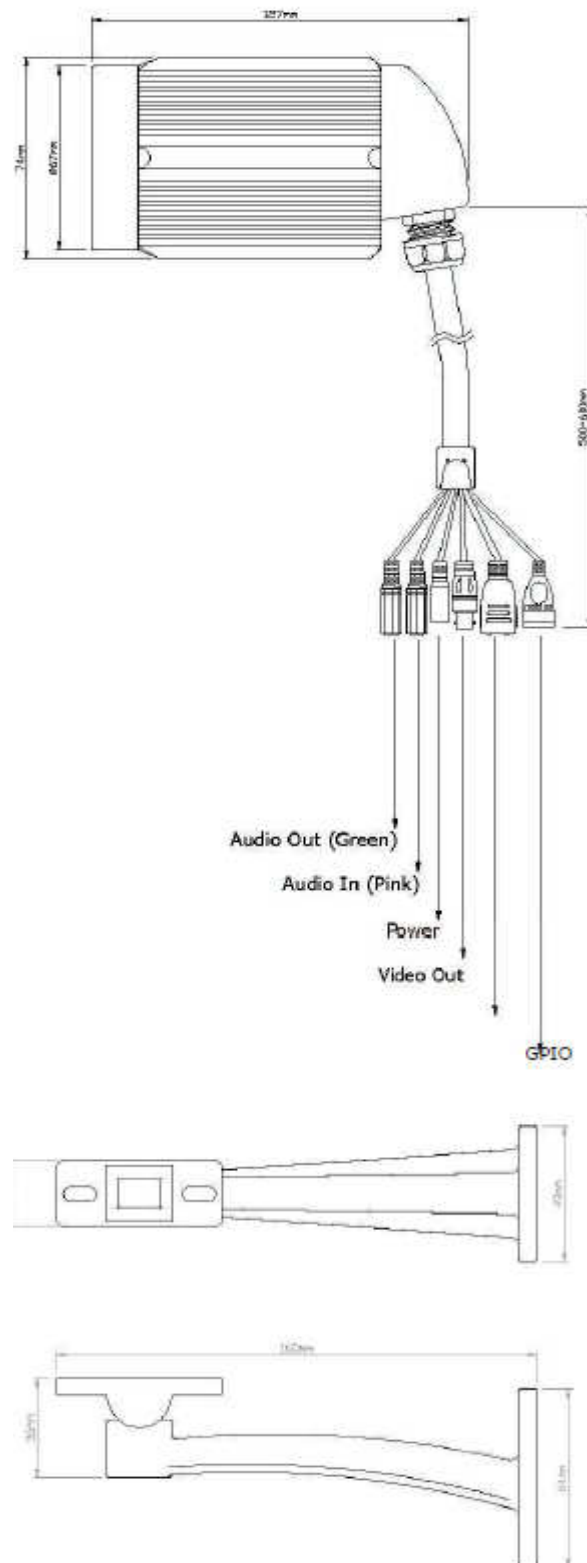

*subject to change without notice.